

## OVEN CONTROLLED CRYSTAL OSCILLATOR

<b>Features:</b>	High stability vs. temperature up to $\pm 3E-8$	Frequency range: 1—60M
------------------	---	------------------------

**OPTION GUIDE:** OX225---58---J---12---JT---[SIN]---13M

<b>Temperature stability</b>	<b>Aging</b>	<b>Output</b>	<b>Supply Voltage</b>
38: +/-3E-8 58: +/-5E-8 17: +/-1E-7 27: +/-2E-7 37: +/-3E-7 57: +/-5E-7	J: +/-5E-7/year I: +/-3E-7/year H: +/-2E-7/year G: +/-1E-7/year	SIN HCMOS	5: 5V+/-5% 12: 12V+/-5%


Temperature choice

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	U	W	X
-60	-55	-50	-45	-40	-30	-20	-10	0	+10	+25	+40	+45	+50	+55	+60	+65	+70	+75	+80	+85

### SPECIFICATION

<b>Output</b>	SIN	Square Form
<b>Duty cycle</b>	×	40...60%
<b>Short term stability per 1 sec, typical</b>	$<1E-10$	
<b>Daily fluctuation</b>	$\leq \pm 0.05\text{ppm}$	
<b>Frequency stability vs. load changes</b>	$<\pm 1E-8 @ 50 \Omega \pm 10\%$	$<\pm 1E-8 @ 1k \Omega \pm 10\%$
<b>Frequency stability vs. power supply changes</b>	$<\pm 1E-8 @ V_{cc} \pm 10\%$	
<b>Peak current during warm-up @ 25°C</b>	$<500 \text{ mA}$	
<b>Frequency pulling range</b>	$>\pm 5E-6 @ 0.5V \text{ --- } 4.5V$	
<b>Linearity</b>	$\pm 10\%$	
<b>Phase noise, typical for 10M</b>		
<b>1 Hz</b>	-80 dBc/Hz	
<b>10 Hz</b>	-115 dBc/Hz	
<b>100 Hz</b>	-135 dBc/Hz	
<b>1k Hz</b>	-145 dBc/Hz	
<b>10k Hz</b>	-150 dBc/Hz	
<b>Harmonic suppression</b>	30dB	×
<b>Spurious suppression</b>	70dB	
<b>Input impedance</b>	100k $\Omega$	
<b>Storage temperature range</b>	-40...+85°C	
<b>Other requests:</b>		

**Package:**

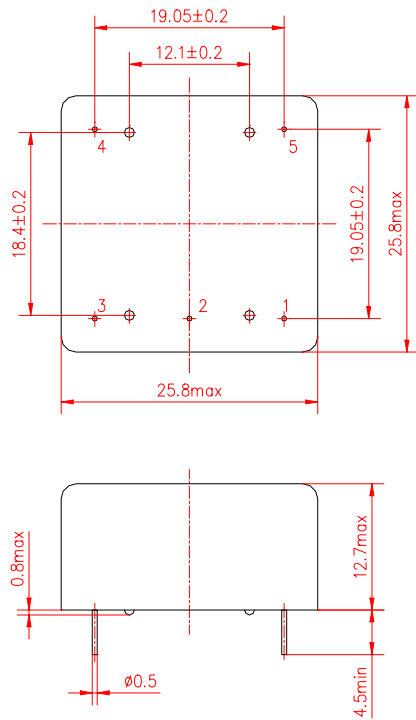

**Pin configuration:**

1. RF-Output
2. GND
3. Voltage Control (Adjustment)
4. NC/ Reference Voltage
5. Supply Voltage

---

Pin diameter will be from 0.5—0.8mm

**Note:**

Not all combinations are available, any requests, please consult factory