

SX7ST OSCILLATOR



Specifications

Parameters	Standard	Options
Frequency range	9,600 MHz - 40,0 MHz	
Logic output	Clipped sinewave	Sinewave
Frequency stability		
Initial at 25°C	± 1.0 ppm	
Temperature	± 3.0 ppm	± 0.5 ppm
vs supply voltage change	± 0.3 ppm	
vs load change	± 0.3 ppm	
Aging first year	± 1.0 ppm	
Operating temperature	0° C ~ +70°C	-20°C ~ +70°C
		-40°C ~ +85°C
		Other on custom request
Storage temperature	-40°C ~ +85°C	-55°C ~ +125°C
Supply voltage	3,3 V +5%	5,0 V ± 5% ; 3,0 V ±5%
		Other on custom request
Current	2,0 mA max	
Load	10 Kohm // 10 pF	Other on custom request
Jitter	Please specify (if required)	
Phase noise		
Harmonics		
Sub-harmonics		
Start-up time	4 ms max.	Other on custom request
Tristate	High or open = enable	no tristate
	Low = disable	
Marking	Freq + Code + Week +Year	


SX7ST OSCILLATOR

Specifications

Voltage Control Options		
External control voltage	+ 1,50 VDC \pm 1,0 VDC +2,5 VDC \pm 2,0 VDC (5,0V)	Other on custom request
Linearity	\pm 10% max.	Other on custom request
Frequency tuning range	\pm 10 ppm	Other on custom request
Pulling slope	Positive	Other on custom request

Drawing

Package	SX7
---------	-----

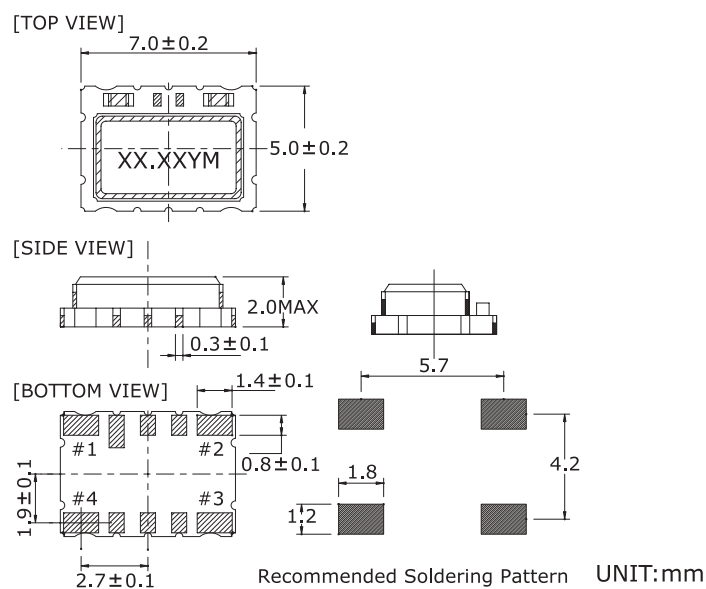

Pin configuration	#1 : NC / Vco	
	#2 : GND	
	#3 : Output	
	#4 : Vcc	